


BB-T

Indoor Use Only

Bronze Butterfly Valve Threaded Type

UL, ULC Listed and FM Approved

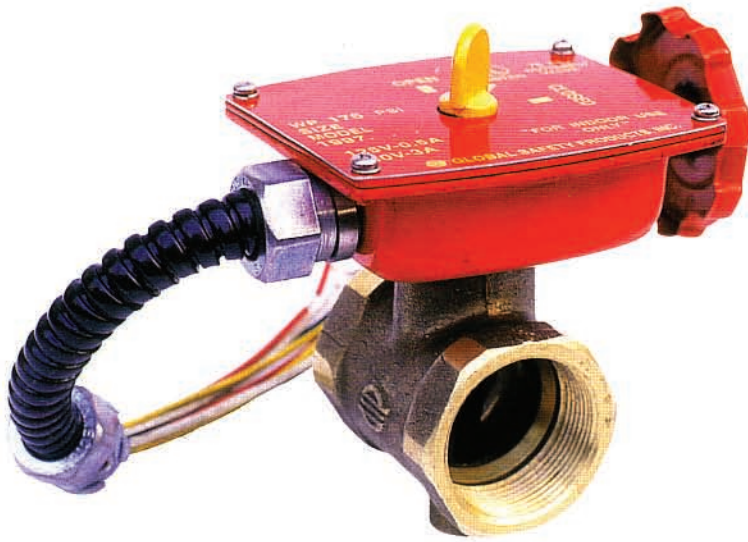

Specifications

Size	: 1" Through 2 1/2"
Working Pressure	: 175 PSI (12.5 Bars)
Max. Test Pressure	: 350 PSI (25.0 Bars)
Working Temperature	: 250°F (120°C)
Factory Installed UL Approved Tampered Switch for Indoor Use Only	

Materials

Body	: Brass, Bronze
Disc	: Brass, Ductile Iron, EPDM Encapsulated
Stem	: Stainless Steel, Hardened & Tempered

Dimensions

(Unit : mm/inch)

SIZE	A	B	C	D	E	Wt.Kg(Lbs)
1"	43.7(1.72)	39.7(1.56)	54.0(2.13)	52(2.05)	37(1.46)	1.5(3.30)
1 1/4"	53.2(2.09)	49.0(1.93)	67.0(2.64)	56(2.20)	41(1.61)	1.7(3.74)
1 1/2"	58.5(2.30)	56.0(2.20)	73.0(2.87)	59(2.32)	44(1.73)	1.8(3.96)
2"	76.0(2.99)	70.0(2.76)	82.4(3.24)	64(2.52)	49(1.93)	2.4(5.28)
2 1/2"	89.0(3.50)	84.0(3.31)	104(4.09)	65(2.56)	50(1.97)	3.1(6.62)

